


LY3401-48x75

- E-shaped frame posts designed to support heavy weight capacity
- Internal iron pipe creates an extra sturdy structure and holds great weight
- Shatter-proof and water-resistant film bonded onto the glass
- · Bypass sliding door for both left and right side access
- 5/16" (8mm) thick certified clear tempered glass
- · Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- · Designed and manufactured to be easily installed




More information at www.pasgo.com

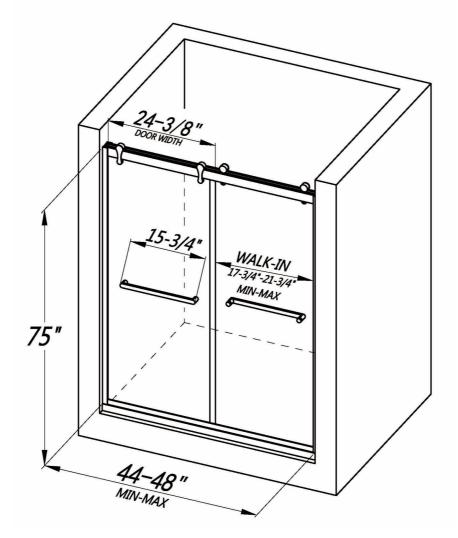

LY3401-54x75


- E-shaped frame posts designed to support heavy weight capacity
- Internal iron pipe creates an extra sturdy structure and holds great weight
- Shatter-proof and water-resistant film bonded onto the glass
- · Bypass sliding door for both left and right side access
- 5/16" (8mm) thick certified clear tempered glass
- · Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- · Designed and manufactured to be easily installed

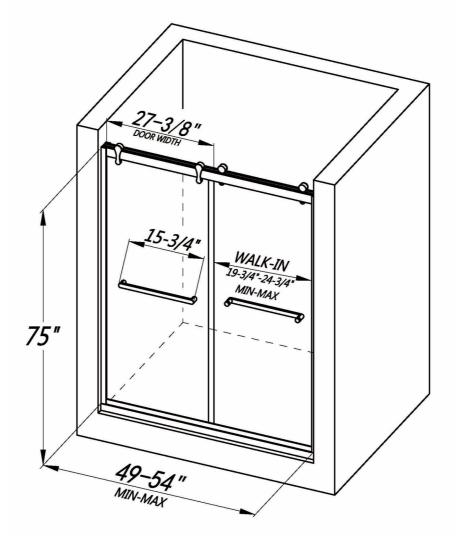



LY3401-60x75

- E-shaped frame posts designed to support heavy weight capacity
- Internal iron pipe creates an extra sturdy structure and holds great weight
- Shatter-proof and water-resistant film bonded onto the glass
- · Bypass sliding door for both left and right side access
- 5/16" (8mm) thick certified clear tempered glass
- · Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- · Designed and manufactured to be easily installed

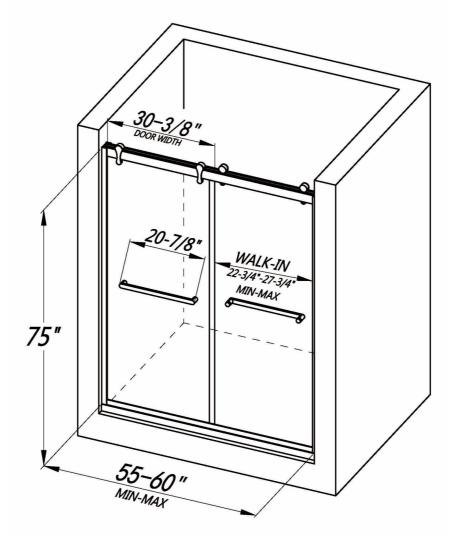

More information at www.pasgo.com



LY3401-66x75

- E-shaped frame posts designed to support heavy weight capacity
- Internal iron pipe creates an extra sturdy structure and holds great weight
- Shatter-proof and water-resistant film bonded onto the glass
- · Bypass sliding door for both left and right side access
- 5/16" (8mm) thick certified clear tempered glass
- · Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- · Designed and manufactured to be easily installed

