


LY7501-48x75


- Single sliding door with one stationary panel
- Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- · Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- · Designed and manufactured to be easily installed



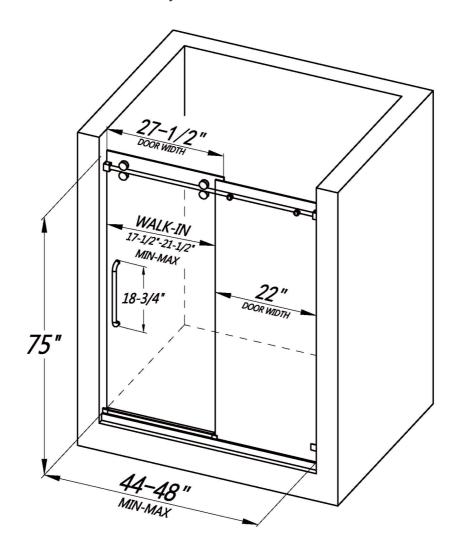

LY7501-54x75


- Single sliding door with one stationary panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

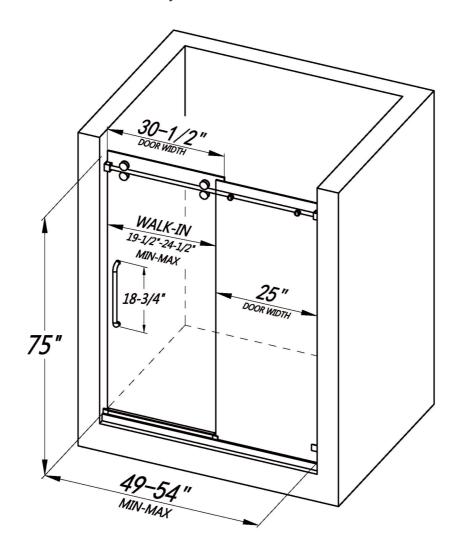



LY7501-60x75


- Single sliding door with one stationary panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- · Designed and manufactured to be easily installed

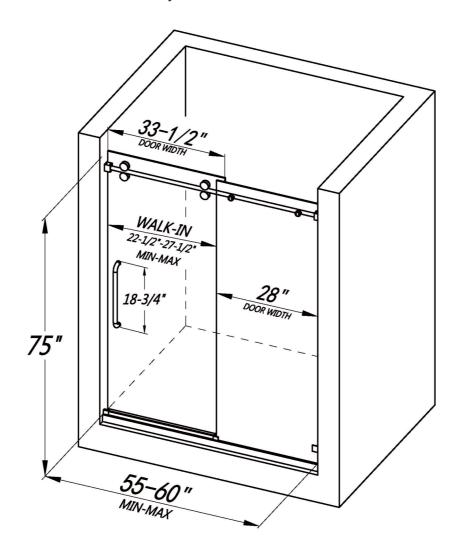



LY7501-66x75

- · Single sliding door with one stationary panel
- Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- · Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

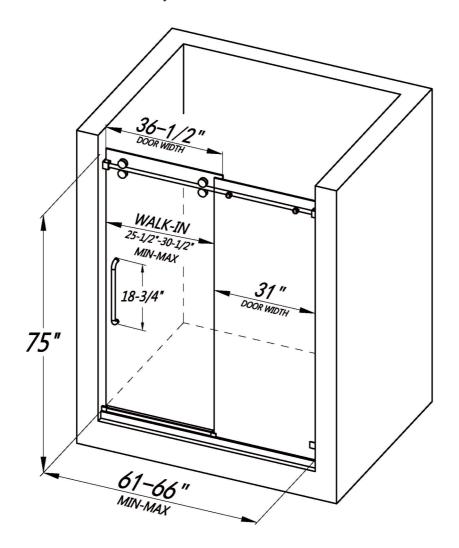



LY7501-72x75

- Single sliding door with one stationary panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- · Designed and manufactured to be easily installed

