


LY7505-48x32x75


- Single sliding corner enclosure with side panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed



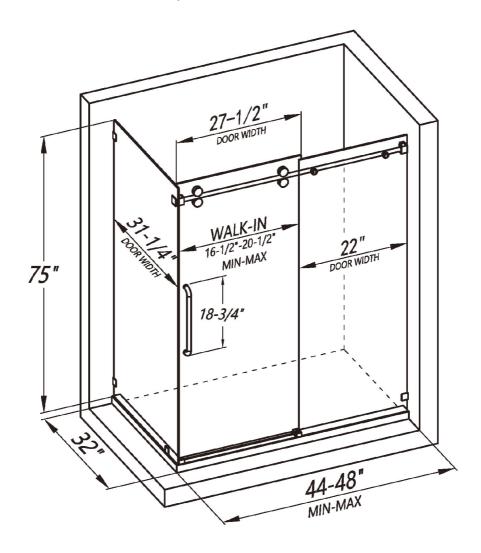

LY7505-54x32x75


- Single sliding corner enclosure with side panel
- Reversible installation for left or right-handed opening
- Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

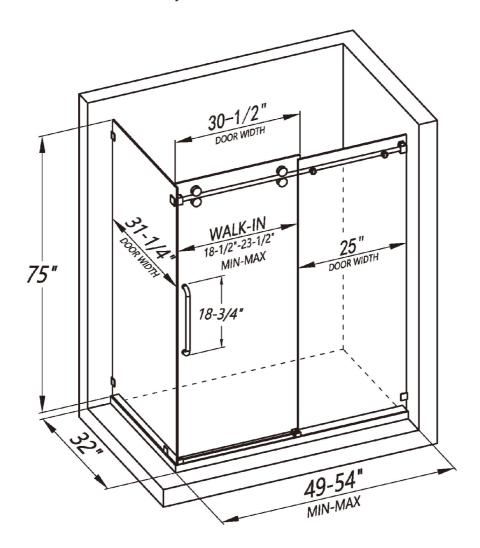



LY7505-60x32x75


- Single sliding corner enclosure with side panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

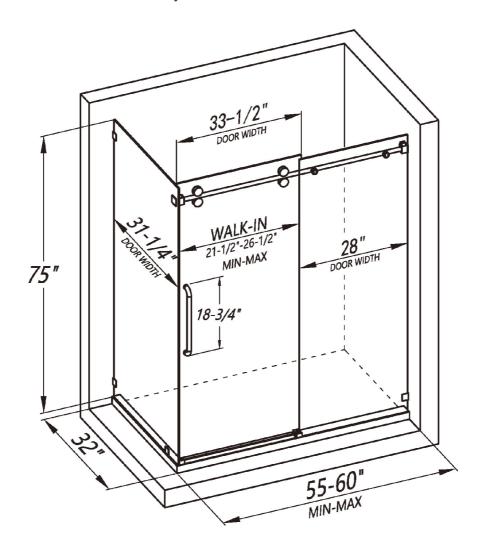



LY7505-66x32x75


- Single sliding corner enclosure with side panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

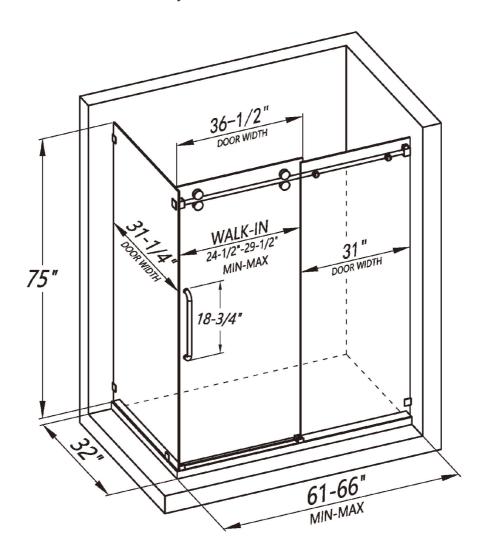



LY7505-72x32x75


- Single sliding corner enclosure with side panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

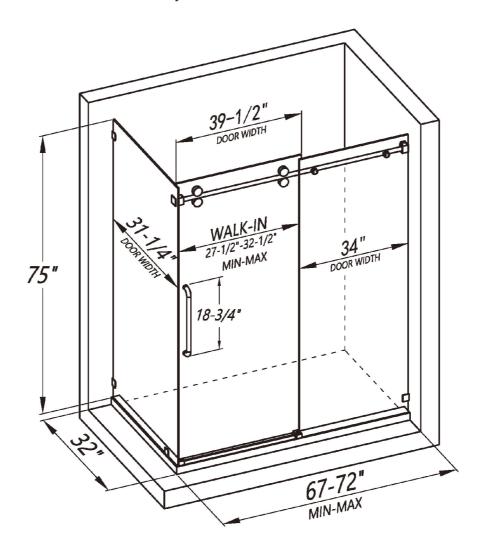



LY7505-48x36x75


- Single sliding corner enclosure with side panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

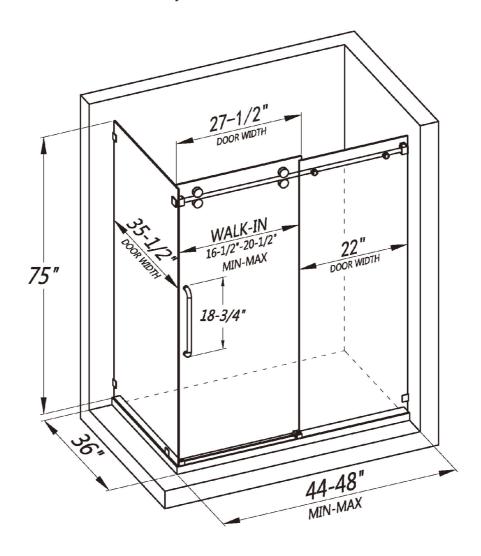



LY7505-54x36x75


- Single sliding corner enclosure with side panel
- Reversible installation for left or right-handed opening
- Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

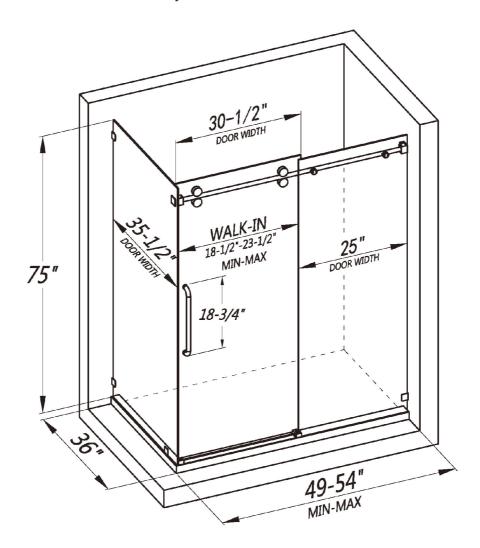



LY7505-60x36x75


- Single sliding corner enclosure with side panel
- · Reversible installation for left or right-handed opening
- · Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

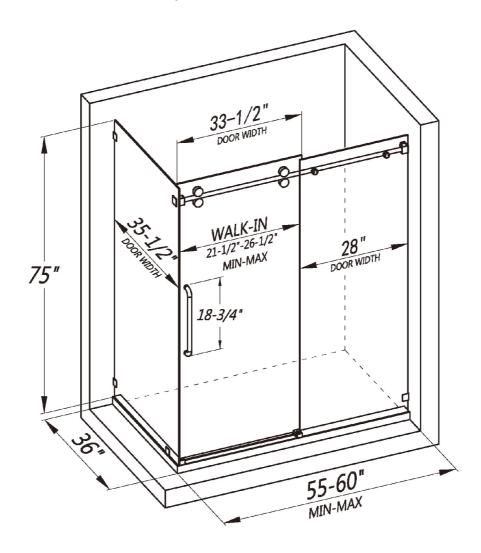



LY7505-66x36x75

- Single sliding corner enclosure with side panel
- · Reversible installation for left or right-handed opening
- Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

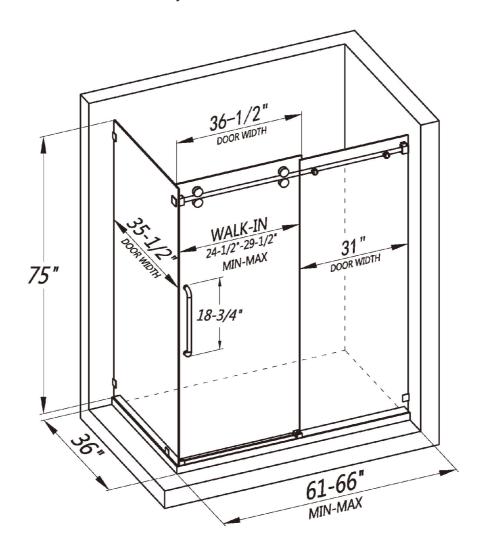



LY7505-72x36x75

- Single sliding corner enclosure with side panel
- · Reversible installation for left or right-handed opening
- Shatter-proof and water-resistant film bonded onto the glass
- 3/8" (10mm) thick certified clear tempered glass
- Premium 304 stainless steel hardware to provide smooth and silent sliding
- Up to 5" in width adjustment to fit your opening
- Designed and manufactured to be easily installed

