PASGO®


SPECIFICATION SHEET

BYPASS SLIDING SHOWER DOOR

LY8201-48x72

FEATURES

- Built-in roller structure secures the glass in place and prevents accidents caused by physical impact
- Shatter-proof and water-resistant film bonded onto the glass
- Bypass sliding door for both left and right side access
- 1/4” (6mm) thick certified clear tempered glass
- Premium Aluminum hardware to provide smooth and silent sliding
- Up to 5” in width adjustment to fit your opening
- Designed and manufactured to be easily installed

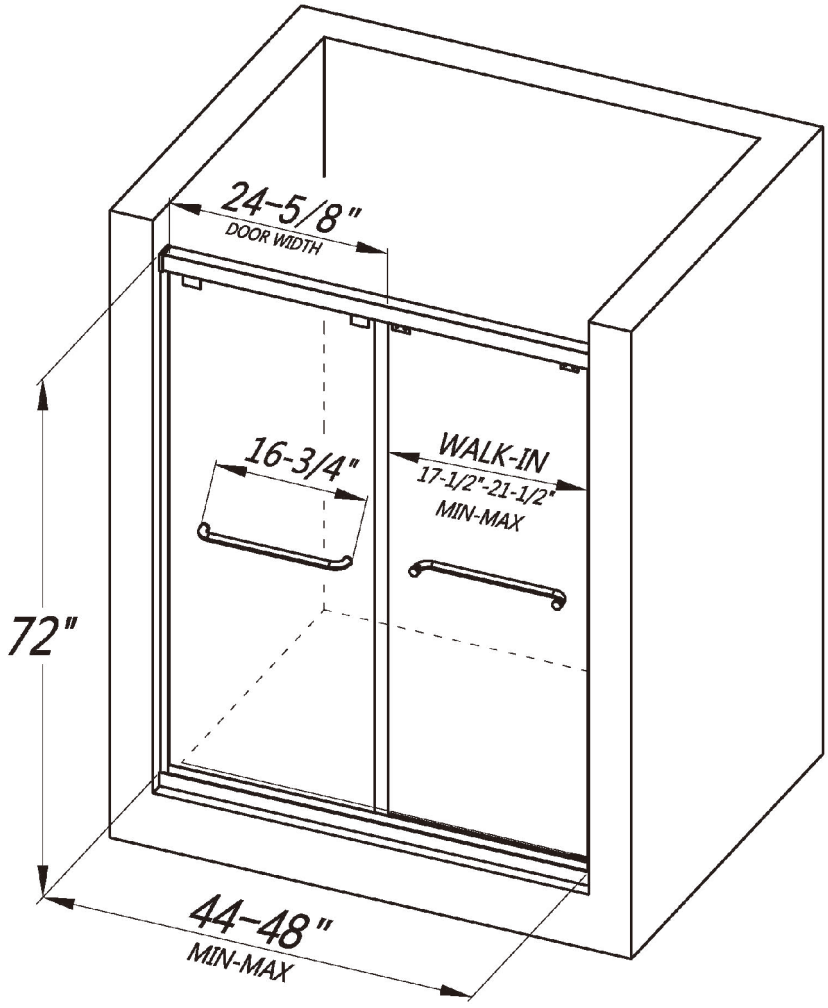

PASGO®


SPECIFICATION SHEET

BYPASS SLIDING SHOWER DOOR

LY8201-54x72

FEATURES

- Built-in roller structure secures the glass in place and prevents accidents caused by physical impact
- Shatter-proof and water-resistant film bonded onto the glass
- Bypass sliding door for both left and right side access
- 1/4” (6mm) thick certified clear tempered glass
- Premium Aluminum hardware to provide smooth and silent sliding
- Up to 5” in width adjustment to fit your opening
- Designed and manufactured to be easily installed

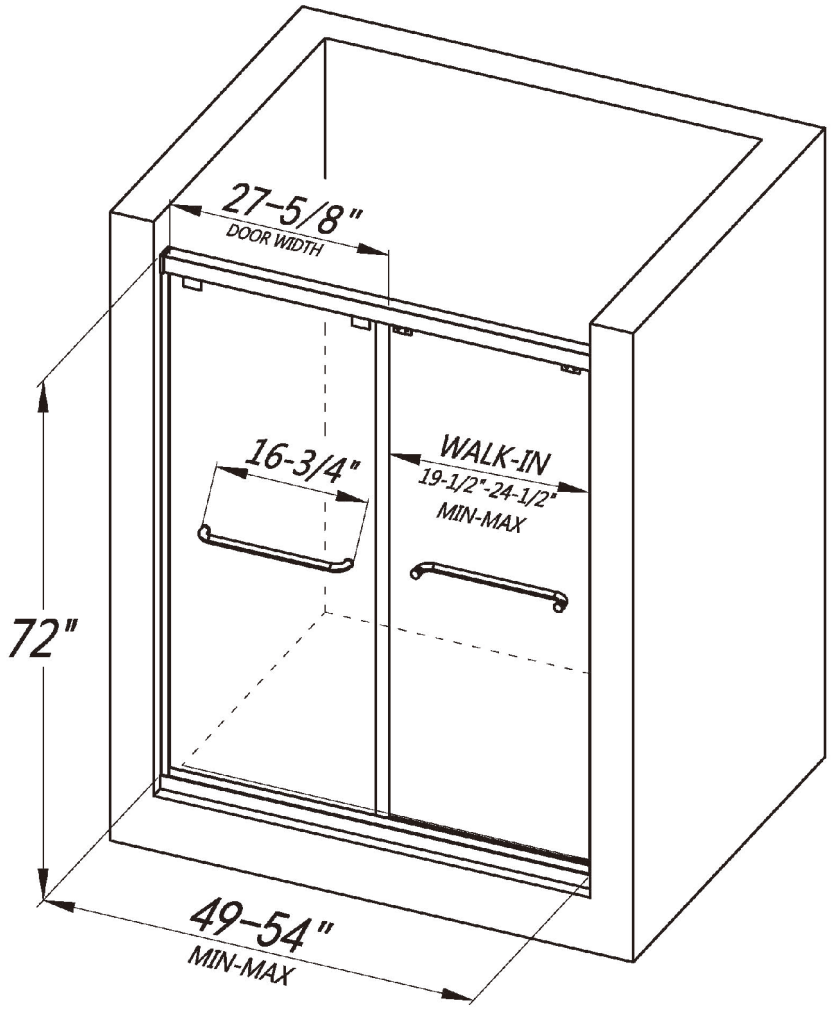

PASGO®


SPECIFICATION SHEET

BYPASS SLIDING SHOWER DOOR

LY8201-60x72

FEATURES

- Built-in roller structure secures the glass in place and prevents accidents caused by physical impact
- Shatter-proof and water-resistant film bonded onto the glass
- Bypass sliding door for both left and right side access
- 1/4” (6mm) thick certified clear tempered glass
- Premium Aluminum hardware to provide smooth and silent sliding
- Up to 5” in width adjustment to fit your opening
- Designed and manufactured to be easily installed

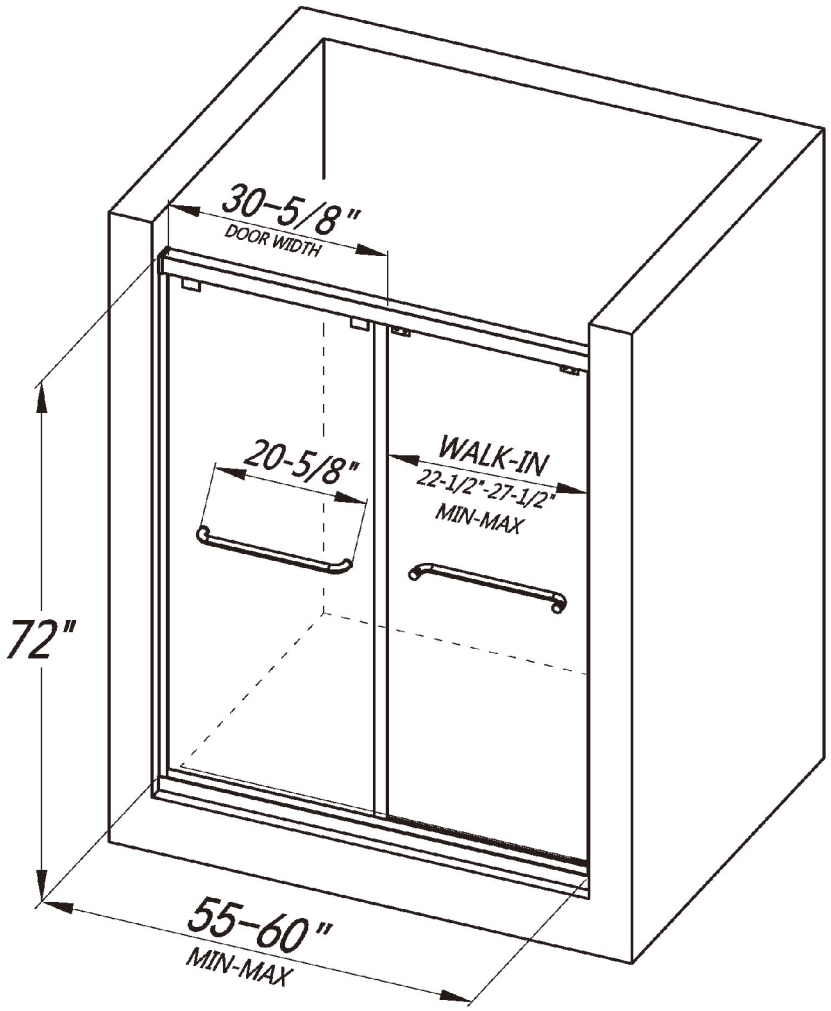

PASGO®

SPECIFICATION SHEET

BYPASS SLIDING SHOWER DOOR

LY8201-60x60

FEATURES

- Built-in roller structure secures the glass in place and prevents accidents caused by physical impact
- Shatter-proof and water-resistant film bonded onto the glass
- Bypass sliding door for both left and right side access
- 1/4” (6mm) thick certified clear tempered glass
- Premium Aluminum hardware to provide smooth and silent sliding
- Up to 5” in width adjustment to fit your opening
- Designed and manufactured to be easily installed

